



HydroTap G5 BCSHA100 5-in-1 Classic tap with Classic Mixer Chrome

Boiling Chilled Sparkling

 **Finish:** Chrome

Product code: H51676Z00AU

Capacity: Commercial

Zip HydroTap Classic 5 in 1 Boiling, Chilled, Sparkling, Filtered water plus Hot and Cold washing up water from two separate taps. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration. Easy to install integrated ventilation tray included.

Specifications

Product name	HydroTap G5 BCSHA100 5-in-1 Classic tap with Classic Mixer Chrome
Product code	H51676Z00AU
Filtered water type	BCSHA
Product approvals	WaterMark, RCM, ARC
Wels rating	6 Star, 3.0 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Capacity, weight & dimensions

Number of people	61-100
Boiling cups per hour	240
Combined chilled and sparkling cups per hour	175

Plumbing

Water supply requirements	Cold
Water connection	1/2" BSP (G1/2)
Water valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Water pressure	Min 300kPa - Max 700kPa

Electrical

Power rating	2.15kW 220-240V 50Hz
Power supply	2 × 10 Amp socket outlets
Booster power rating	Zip HydroTap Booster 2.2kW 220-240V 50/60Hz

Tap design

Tap	Zip HydroTap CLASSIC Tap (Chrome)
HydroTap style	Classic
Mixer tap style	Classic
Finish	Chrome
Disability options	no

Command centre

Dimensions	W395mm x D487mm x H333mm
------------	--------------------------


Installation

Installation requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. **Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.**
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Files

Installation Layout 3D (DWG)

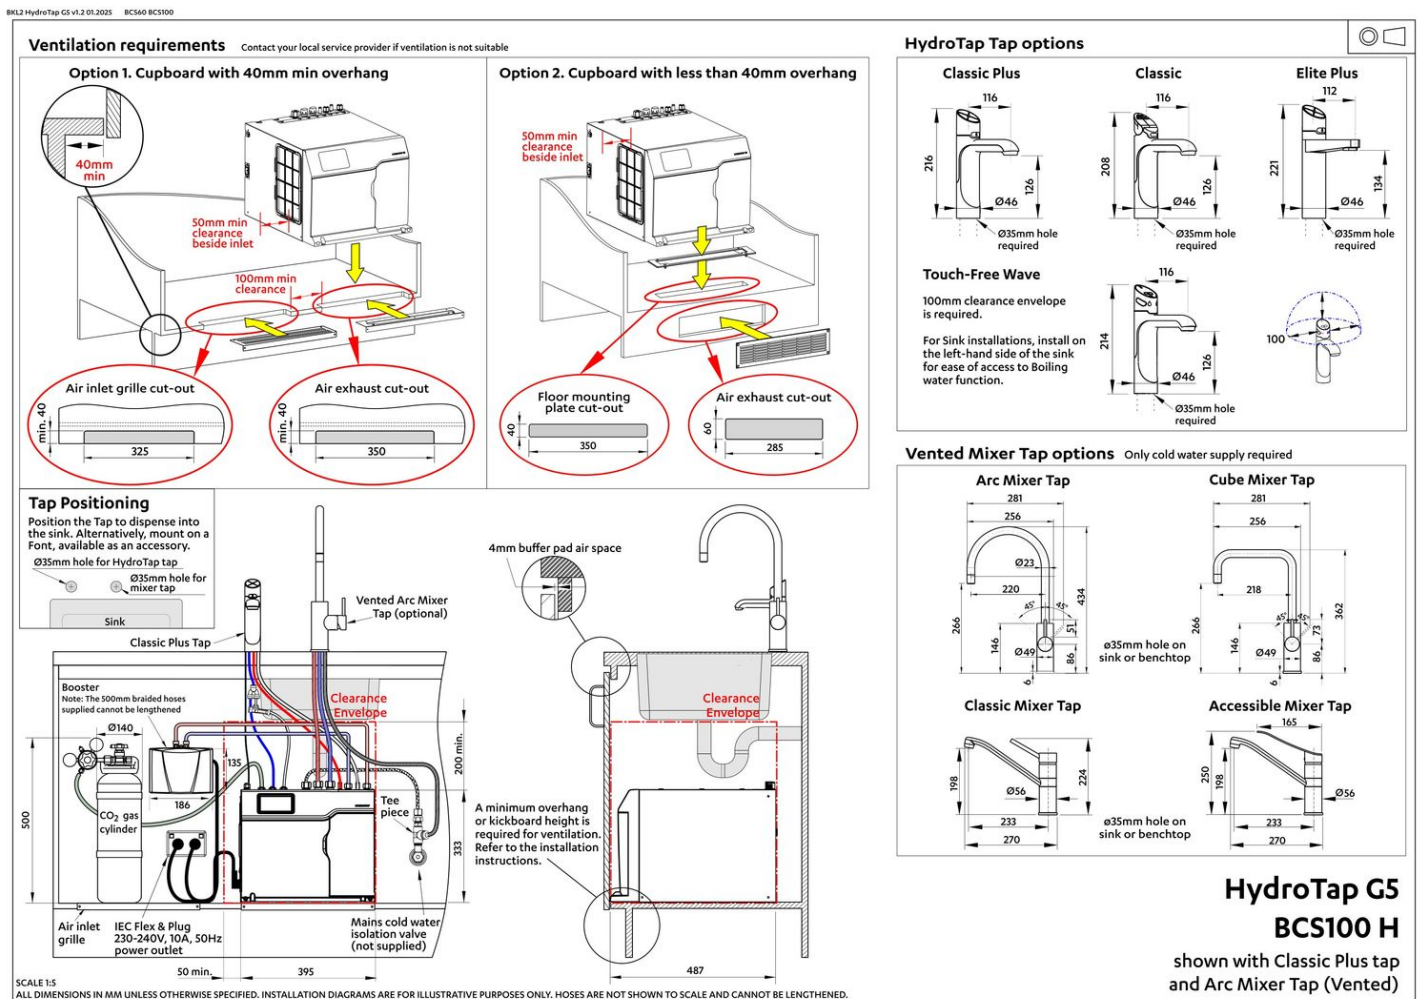

Installation Layout (PDF)

BIM files

LCF

↓ ArchiCAD Swift
Globals Library
(LCF)

LCF

↓ ArchiCAD Zip Water
Library (LCF)

Zip

↓ BIM downloads

RFA

↓ Revit Project File
(RFA)

RVT

↓ Revit Virtual
Showroom (RVT)

Download all

Certifications


ARC
AU02691




Environment
ISO 14001


INTERNATIONAL EPD SYSTEM




Health & Safety
AS/NZS 4801


Quality
ISO 9001


WaterMark


WATER RATING
3.0 litres per minute
In accordance with AS/NZS 6400
Licence No. 0086
Zip Heaters (Asia) Pty Ltd

PDF

↓ ARC (PDF)

PDF

↓ Environment ISO
(PDF)

PDF

↓ Environmental
Product Declaration
Brochure (PDF)

PDF

↓ Filter performance
(PDF)

PDF

↓ Health & Safety
(PDF)

PDF

↓ HydroTap Clean
SDS (PDF)

PDF

↓ Quality ISO (PDF)

Manuals & brochures



 Brochure (PDF)



 CO₂ MSDS (PDF)



 Instruction manual (PDF)



 Quick guide (PDF)



 Tap operation label (PDF)



 User manual (PDF)



Download all