



## HydroTap G5 BCSHA100 Celsius All-In-One Arc Matte Black

Boiling Chilled Sparkling

 **Finish:** Matte Black

**Product code:** H57763Z03AU

**Capacity:** Commercial

Zip HydroTap Design Range CELSIUS All-In-One Boiling, Chilled & Sparkling Filtered water, plus Hot and Cold washing up water from a single tap (hot and cold water supply required). The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and a refillable CO2 cylinder. Easy to install integrated ventilation tray included.

# Specifications

Product name	HydroTap G5 BCSHA100 Celsius All-In-One Arc Matte Black
Product code	H57763Z03AU
Filtered water type	BCSHA
Product approvals	WaterMark, RCM, ARC
WELS rating	5 Star, 6.0 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)
Chilling Technology	Air cooled technology making it 100% water efficient

# Capacity, weight & dimensions

Number of people	61-100
Boiling cups per hour	240
Combined chilled and sparkling cups per hour	175

# Plumbing

Water supply requirements	Cold and Hot
Water connection	1/2" BSP (G1/2)
Water valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Water pressure	Min 250kPa - Max 700kPa

# Electrical

Power rating	2.15kW 220-240V 50Hz
Power supply	2 × 10 Amp socket outlets
Booster power rating	Zip HydroTap Booster 2.2kW 220-240V 50/60Hz

# Tap design

<b>Tap</b>	Zip HydroTap Design Range CELSIUS All-In-One ARC Tap (Matte Black)
<b>HydroTap style</b>	Celsius All-In-One Arc
<b>Finish</b>	Matte Black
<b>Disability options</b>	Unavailable

# Command centre

<b>Dimensions</b>	W395mm x D487mm x H333mm
-------------------	--------------------------


# Installation

## Installation requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage. The HydroTap must be installed to within the limits of the hose and cable lengths supplied.
3. **Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.**
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com/book-service-visit](http://www.zipwater.com/book-service-visit)


## Files

Installation Layout 3D (DWG)

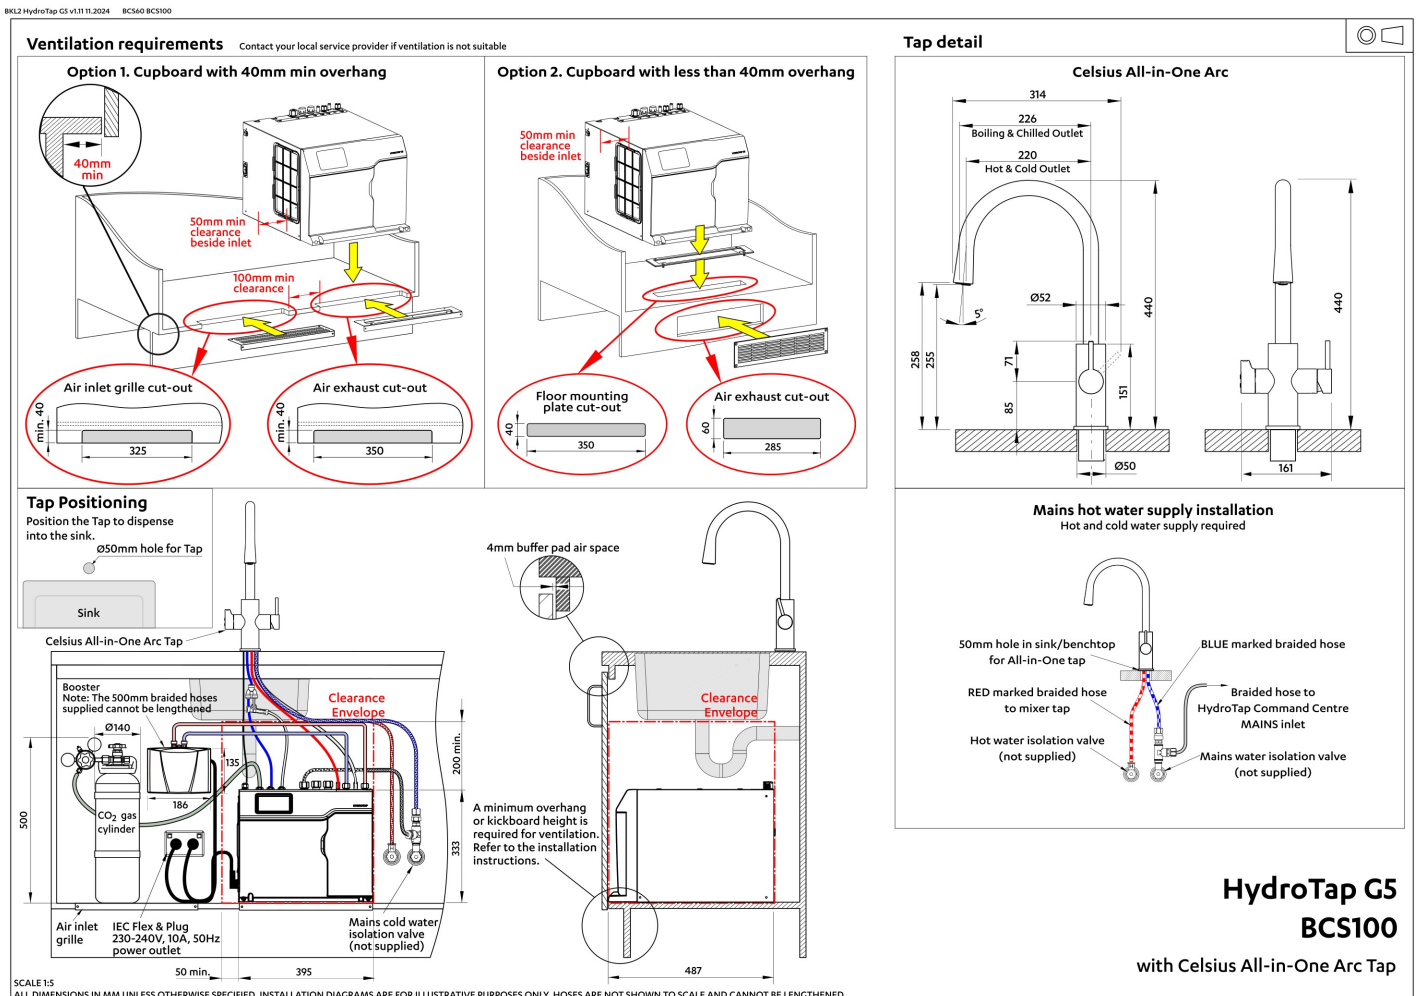

Installation Layout (PDF)

Tap Detail (DWG)

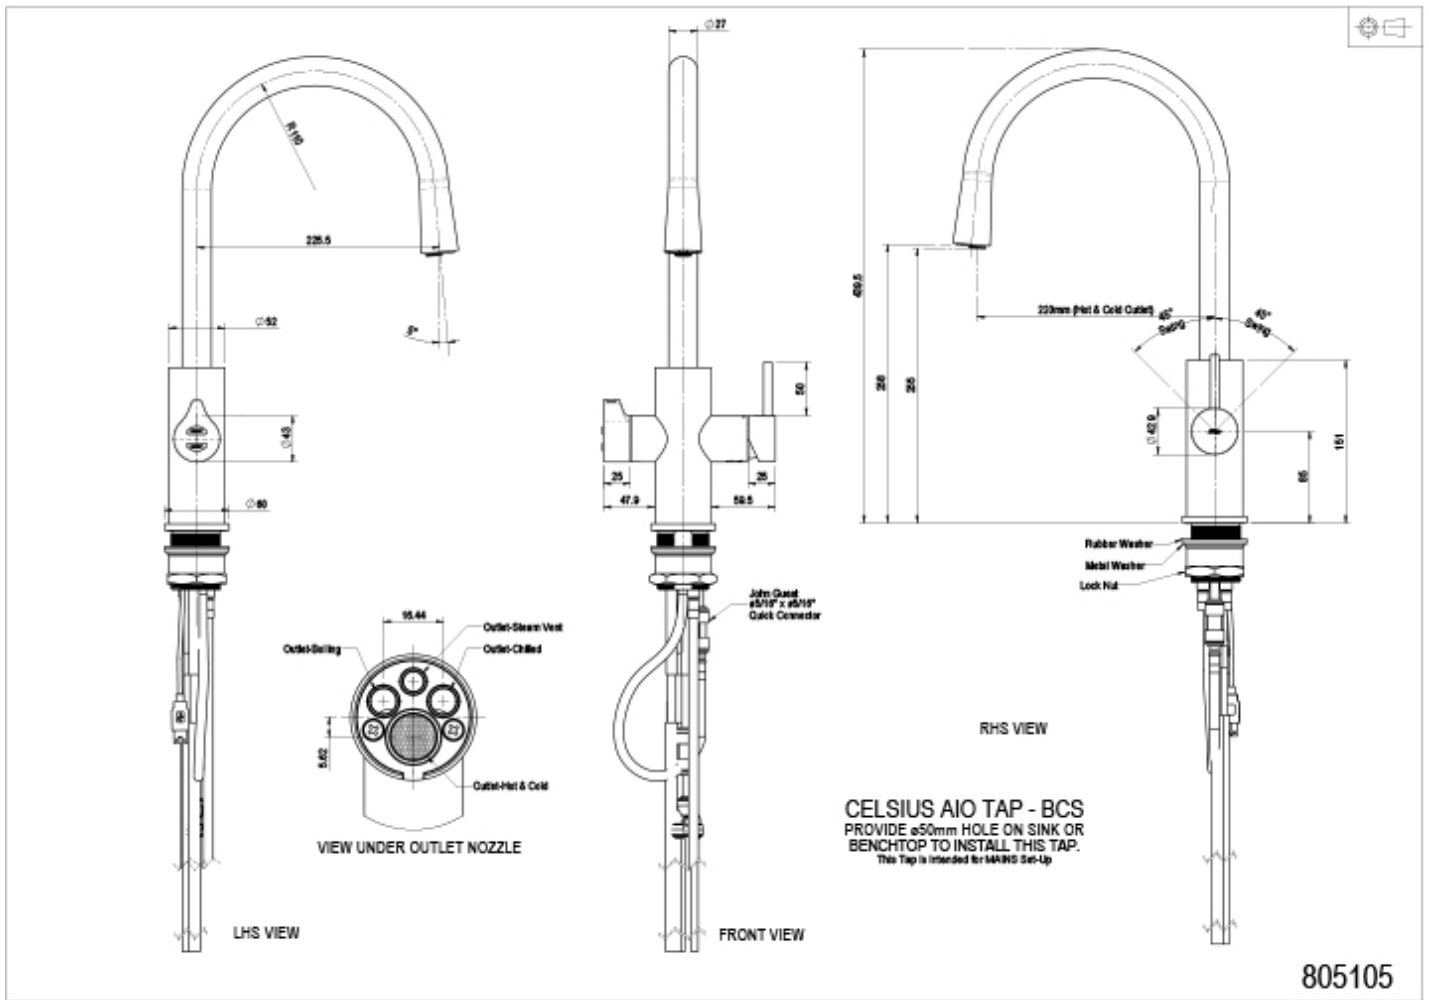

Tap Detail (PDF)

## BIM files

LCF

ArchicAD Swift  
 Globals Library  
 (LCF)

LCF

ArchicAD Zip Water  
 Library (LCF)

ZIP

Revit Project File  
 (RFA)

RVT

Revit Virtual  
 Showroom (RVT)

Download all

# Certifications



Environment  
ISO 14001



OHS  
ISO 45001



Quality  
ISO 9001



↓ ARC (PDF)



↓ Environment ISO (PDF)



↓ Environmental Product Declaration Brochure (PDF)



↓ EPD (PDF)



↓ Filter performance (PDF)



↓ Health & Safety (PDF)



↓ HydroTap Clean SDS (PDF)



↓ Quality ISO (PDF)

# Manuals & brochures



↓ Brochure (PDF)



↓ CO<sub>2</sub> MSDS (PDF)



↓ Instruction manual (PDF)



↓ Quick guide (PDF)



↓ Tap operation label (PDF)



↓ User manual (PDF)

↓ Download all

# Accessories



9354002

Vent Tray BC/BCS