



HydroTap G5 BCS100 Touch-Free Wave Chrome

Boiling Chilled Sparkling



Finish: Chrome

Product code: H5W763Z00AU

Capacity: Commercial

Zip HydroTap Touch-Free Wave Boiling, Chilled, Sparkling, Filtered water tap uses smart infrared 100% touch-free operation that is activated with the Wave of a hand. The water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and a refillable CO2 cylinder.

Specifications

Product name	HydroTap G5 BCS100 Touch-Free Wave Chrome
Product code	H5W763Z00AU
Filtered water type	BCS
Product approvals	WaterMark, RCM, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)
Chilling Technology	Air cooled technology making it 100% water efficient

Capacity, weight & dimensions

Number of people	61-100
Boiling cups per hour	240
Chilled cups per hour	175
Combined chilled and sparkling cups per hour	175

Plumbing

Water supply requirements	Cold
Water connection	1/2" BSP (G1/2)
Water valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Water pressure	Min 250kPa - Max 700kPa

Electrical

Power rating	2.15kW 220-240V 50Hz
Power supply	2 × 10 Amp socket outlets
Booster power rating	Zip HydroTap Booster 2.2kW 220-240V 50/60Hz

Tap design

Tap	Zip HydroTap Touch-Free Wave tap (Chrome)
HydroTap style	Touch-Free Wave
Finish	Chrome

Command centre

Dimensions W395mm x D487mm x H333mm


Installation

Installation requirements

- 1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
- 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage. The HydroTap must be installed to within the limits of the hose and cable lengths supplied.
- 3. Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.
- 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
- 5. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Files

Installation Layout 3D (DWG)

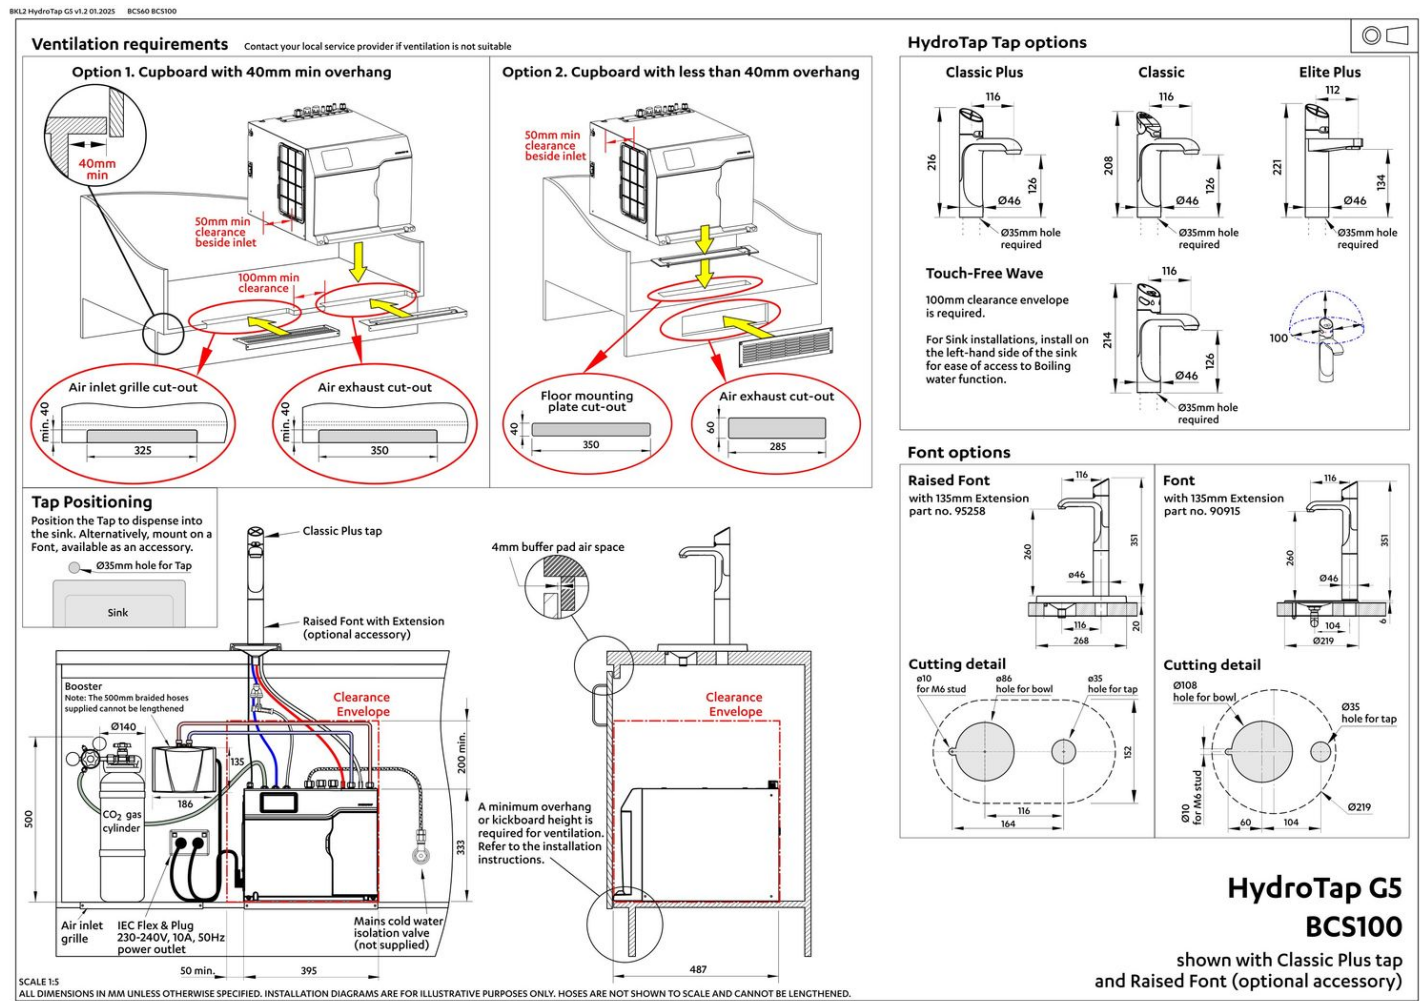

Installation Layout (PDF)

BIM files



↓ ArchiCAD Zip Water Library (IFC)




↓ Revit Project File (RFA)



↓ Revit Virtual Showroom (RVT)

↓ Download all

Certifications

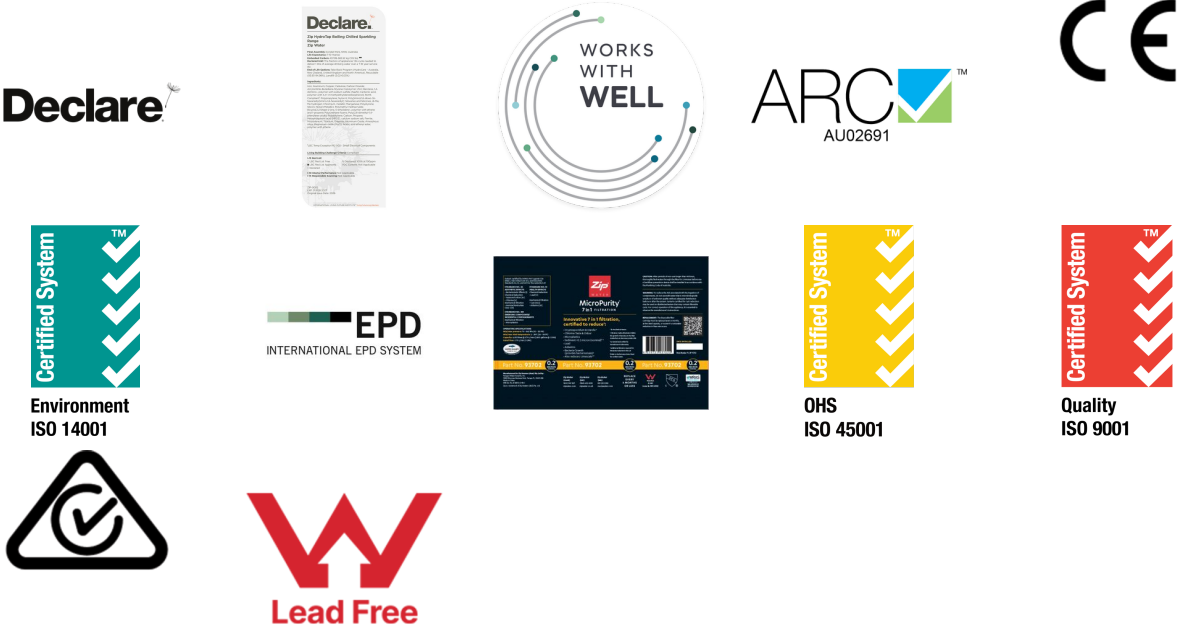

↓ ARC (PDF)



↓ Environment ISO (PDF)



↓ Environmental Product Declaration Brochure (PDF)



↓ Filter performance (PDF)



↓ Health & Safety (PDF)



↓ HydroTap Clean SDS (PDF)



↓ Quality ISO (PDF)

Manuals & brochures



↓ Brochure (PDF)



↓ CO₂ MSDS (PDF)



↓ Instruction manual (PDF)



↓ Quick guide (PDF)



↓ Tap operation label (PDF)



↓ User manual (PDF)

↓ Download all

Accessories



90915Z0002

Font Kit Chrome



95258Z0002

Font Kit Raised Chrome