



HydroTap G5 BCSHA Celsius Plus All-In-One Pull-Out Chrome

Boiling Chilled Sparkling

 **Finish:** Chrome

Product code: H5X783Z00AU

Capacity: Residential

Zip HydroTap Design Range CELSIUS PLUS All-In-One Pull-Out Boiling, Chilled & Sparkling Filtered water, plus Hot and Cold washing up water from a single tap (hot and cold water supply required) including the artfully incorporated pull-out sprayer for convenience. The intuitive touch-pad with antimicrobial protection operates the filtered drinking water, while the lever dispenses unfiltered hot and cold water. Enhanced sparkling water delivery every time with an optimised aerator hidden inside the elegant spout of the tap. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.

This product is available from selected specialist retailers. Click the "Find your Specialist Retailer" link to find your local showroom.

Specifications

Product name	HydroTap G5 BCSHA Celsius Plus All-In-One Pull-Out Chrome
Product code	H5X783Z00AU
Filtered water type	BCSHA
Product approvals	WaterMark, RCM, ARC
Wels rating	6 Star, 4.5 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Plumbing

Water supply requirements	Cold and Hot
Water connection	1/2" BSP (G1/2)
Water valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Water pressure	Min 250kPa - Max 700kPa

Electrical

Power rating	1.8kW 220-240V 50Hz
Power supply	1 × 10 Amp socket outlet

Tap design

Tap	Zip HydroTap Design Range CELSIUS PLUS All-In-One Pull-Out Tap (Chrome)
HydroTap style	Celsius Plus All-In-One Pull-Out
Finish	Chrome
Disability options	Unavailable

Command centre

Dimensions	W339mm x D483mm x H333mm
------------	--------------------------


Installation

Installation requirements

- 1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
- 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
- 3. Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.
- 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
- 5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
- 6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit





Files

Installation Layout 3D (DWG)

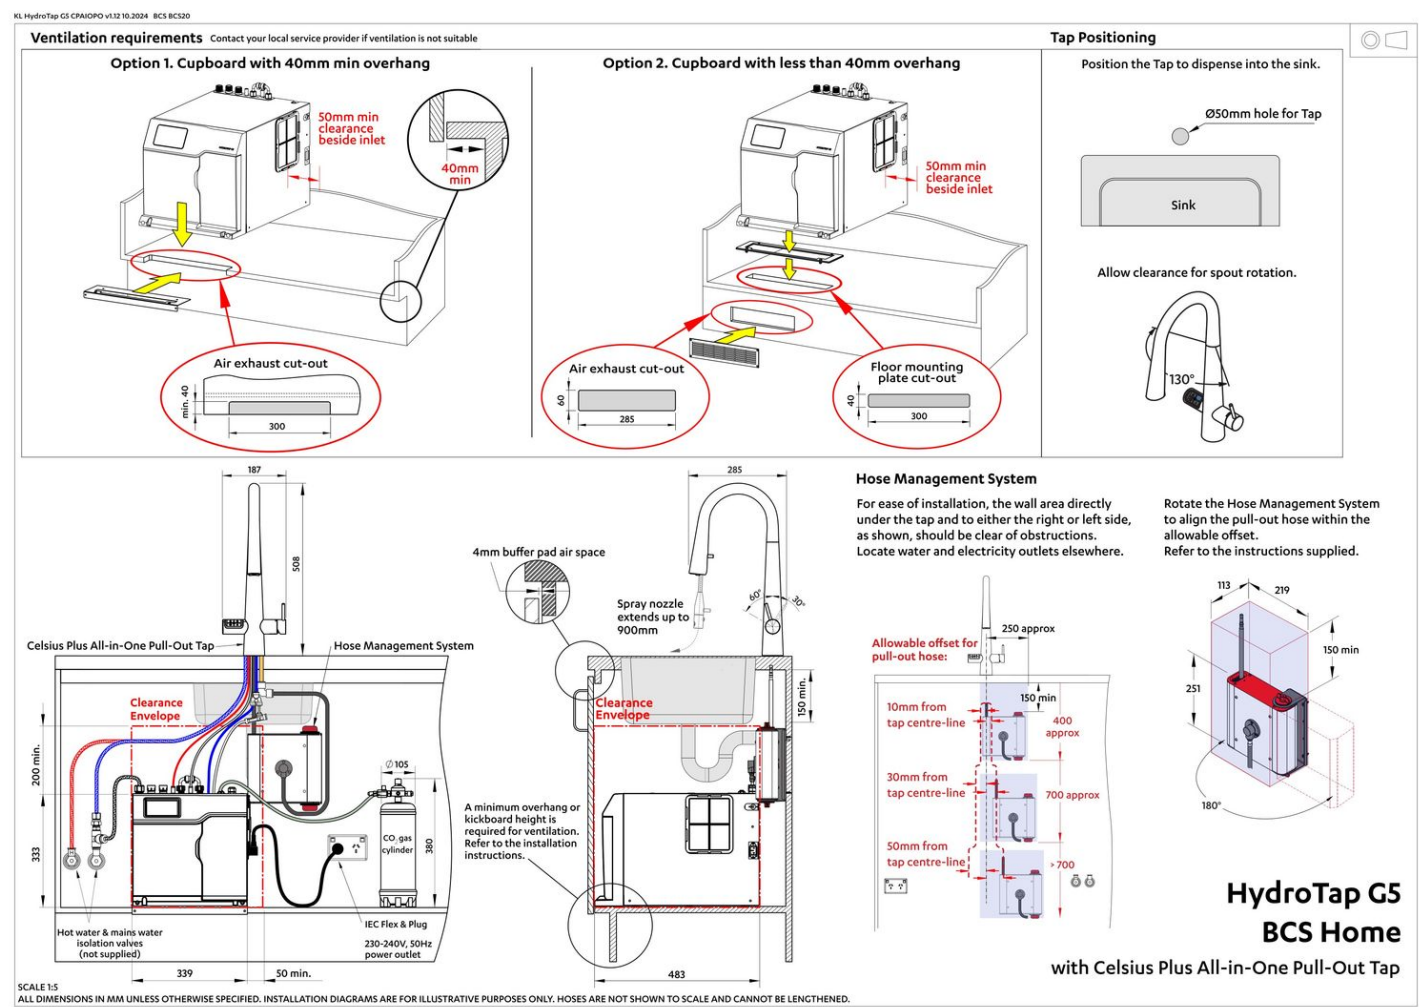

Installation Layout (PDF)

Tap Detail (DWG)

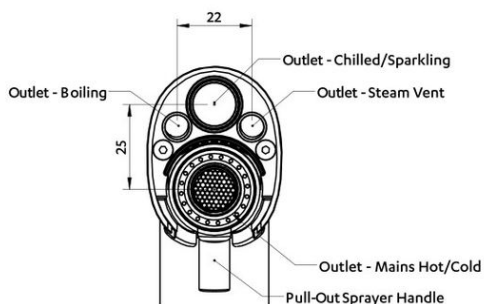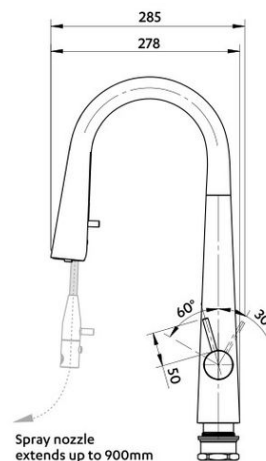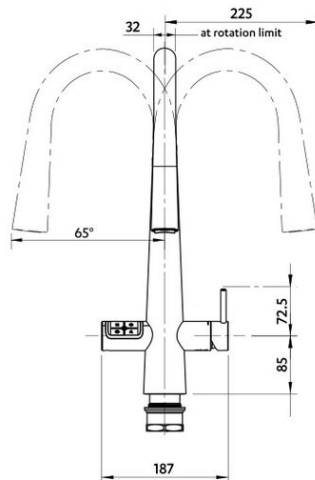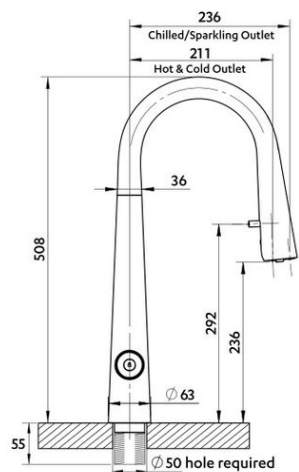

VIEW UNDER OUTLET NOZZLE

Provide Ø50mm hole in sink/benchtop to install.
This Tap is intended for MAINS setup

ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED

CELSIUS PLUS ALL-IN-ONE PULL-OUT - BC, BCS

Tap Detail (PDF)

BIM files

LCF

LCF

RFA

RVT

ArchiCAD Swift
Globals Library
(LCF)

ArchiCAD Zip Water
Library (LCF)

Revit Project File
(RFA)

Revit Virtual
Showroom (RVT)

Download all

Certifications



↓ Health & Safety (PDF)



↓ Environment ISO (PDF)



↓ Quality ISO (PDF)



↓ Environmental Product Declaration Brochure (PDF)



↓ EPD (PDF)



↓ ARC (PDF)



↓ Filter performance (PDF)



↓ HydroTap Clean SDS (PDF)

Manuals & brochures



↓ Brochure (PDF)



↓ CO₂ MSDS (PDF)



↓ Instruction manual (PDF)



↓ Quick guide (PDF)



↓ Tap operation label (PDF)



↓ User manual (PDF)

↓ Download all